


PULL-OUT SHELF INSTALLATION INSTRUCTIONS

Determine which set of slots, on the cabinet, will place your shelf at the desired height.

Determine which slider is left and which is right. When the sliders are installed properly the inside shelf support tabs are pointing upwards, to carry the shelf.

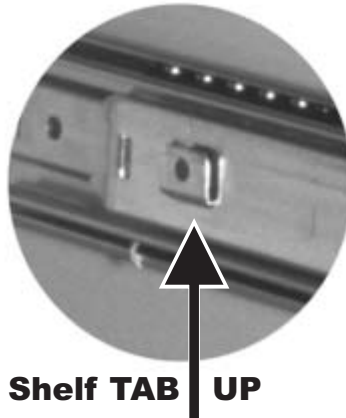

Insert the larger, rear facing slider tab into the rear slot of the cabinet and push the slider toward the rear.

Then line up the small, downward facing slider tab into the corresponding cabinet slot at the front of the cabinet. Make sure it is hooked in, then apply downward force to snap it in place. Once it is snapped down it should not move.

Install the opposite side slider. Be sure to use the corresponding slots on the opposite side..

If you have to relocate the slider, use work gloves or wrap a towel around the slider. Grasp the slider firmly, with both hands and twist the top of the slider inward, while pulling upward at the same time, until it releases. This maneuver does require a good deal of effort.

Now align the slots on the shelf with the tabs on the slider and snap the shelf down onto both sliders. When properly installed the shelf should be firmly locked down onto the sliders.

Please use the cabinet carefully. Whenever a shelf or drawer is extended, it acquires enough leverage to tip a cabinet unless it is properly weighted, balanced and anchored.

Thank you for choosing **CAN-AM**.

